


Advantages of Ultrabond Eco 4 LVT

- Excellent trowelability
- Rapid set development
- Good wetting of the back of planks up to 30 minutes after spreading
- High final hold
- Excellent dimensional stability
- Solvent-free
- Certified as EC1 Plus - very low emission level of volatile organic compounds
- Certified as Der Blaue Engel



Results of dimensional stability tests carried out on an LVT strip according to EN 1903 standards with **Ultrabond Eco 4 LVT** compared with a generic adhesive for PVC.

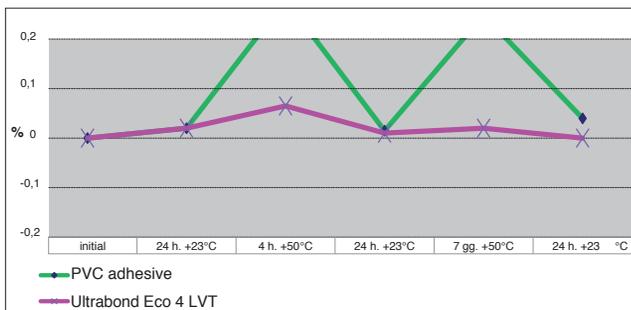

C.P. MK 707730 - (GB) 12/13



• **Technical documentation**
From the technical area menu you can view the technical documentation divided per product lines and type of document.

HEADQUARTERS
MAPEI SpA
Via Caffiero, 22 - 20158 Milan
Tel. +39-02-37673.1
Fax +39-02-37673.214
Internet: www.mapei.com
E-mail: mapei@mapei.it



/mapeispa

Ultrabond Eco 4 LVT

PRODUCTS FOR LVT "LUXURY VINYL TILES"



Ultrabond Eco 4 LVT

Rapid system for the installation of flooring in LVT



Fibre-reinforced LVT adhesive.

AREAS OF USE

- Bonding LVT flooring planks and tiles.
- Suitable also for installing PVC and semi-flexible PVC tiles.
- Recommended for:
 - normal and heavy traffic loads in residential, commercial and industrial areas (e.g. shopping centres, airports, offices, gymnasiums, etc.)
 - loads from wheelchairs in compliance with EN 12529.

PACKAGING

The product is available in 16 kg drums.



Certified as EC1 Plus and Der Blaue Engel



Flooring in LVT

Adhesive **Ultrabond Eco 4 LVT**

Smoothing compound **Planipatch**

Primer **Eco Prim T**

Substrate **Topcem Pronto**