





| SYSTEM FOR THE INSTALLATION OF VINYL SHEET ON FLOORS IN WET AREAS | | | | |
|-------------------------------------------------------------------|-----------------------------------------|---------|--------|----------------------------------------------------------------------------|
| LAYER | | TMin | TMax | Consumption |
| 1 | Concrete substrate | - | | - |
| 2 | <i>Planicrete SP mixed with Mapecem</i> | 2 mm | 3 mm | 1.75 kg/m ² (Planicrete SP) 1.75 kg/m ² (Mapecem) |
| 3 | <i>Mapecem Pronto</i> | 10 mm | 70 mm | 2 kg/m ² /mm |
| 4 | <i>Primer MF (*)</i> | 0.25 mm | 0.5 mm | 0.5 kg/m ² |
| 5 | <i>Mapeflex PU 45 FT</i> | N/A | N/A | See TDS |
| 6 | <i>Mapegum WPS</i> | 0.5 mm | 1.5 mm | 1.2 kg/m ² |
| 7 | <i>Eco Prim T Plus (*)</i> | 0.2 mm | 0.2 mm | 0.15 kg/m ² |
| 8 | <i>Planiprep SC</i> | 0.5 mm | 3 mm | 0.5 kg/m ² /mm |
| 9 | <i>Adesilex G19</i> | 0.5 mm | 1 mm | 0.4 kg/m ² |
| 10 | Vinyl sheet | - | | - |

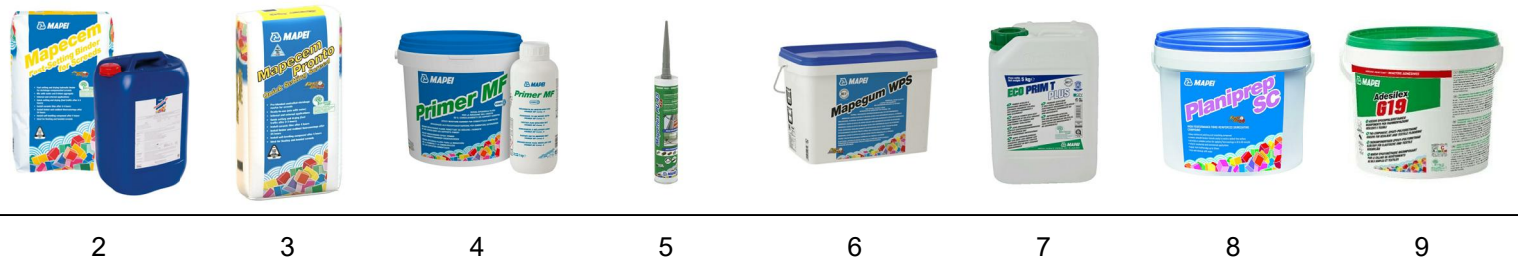


(*) Apply the product according to the thickness specified in the table. In the layout designed using Autodesk Revit software, the same product has been integrated into the next layer because the minimum representable thickness is 0.8 mm.

For information on the characteristics and how to use the aforementioned products, please refer to the latest version of the relative Technical Data Sheets which are available on our website. Please, always verify the availability of the proposed system in the country where it will be used.

Section

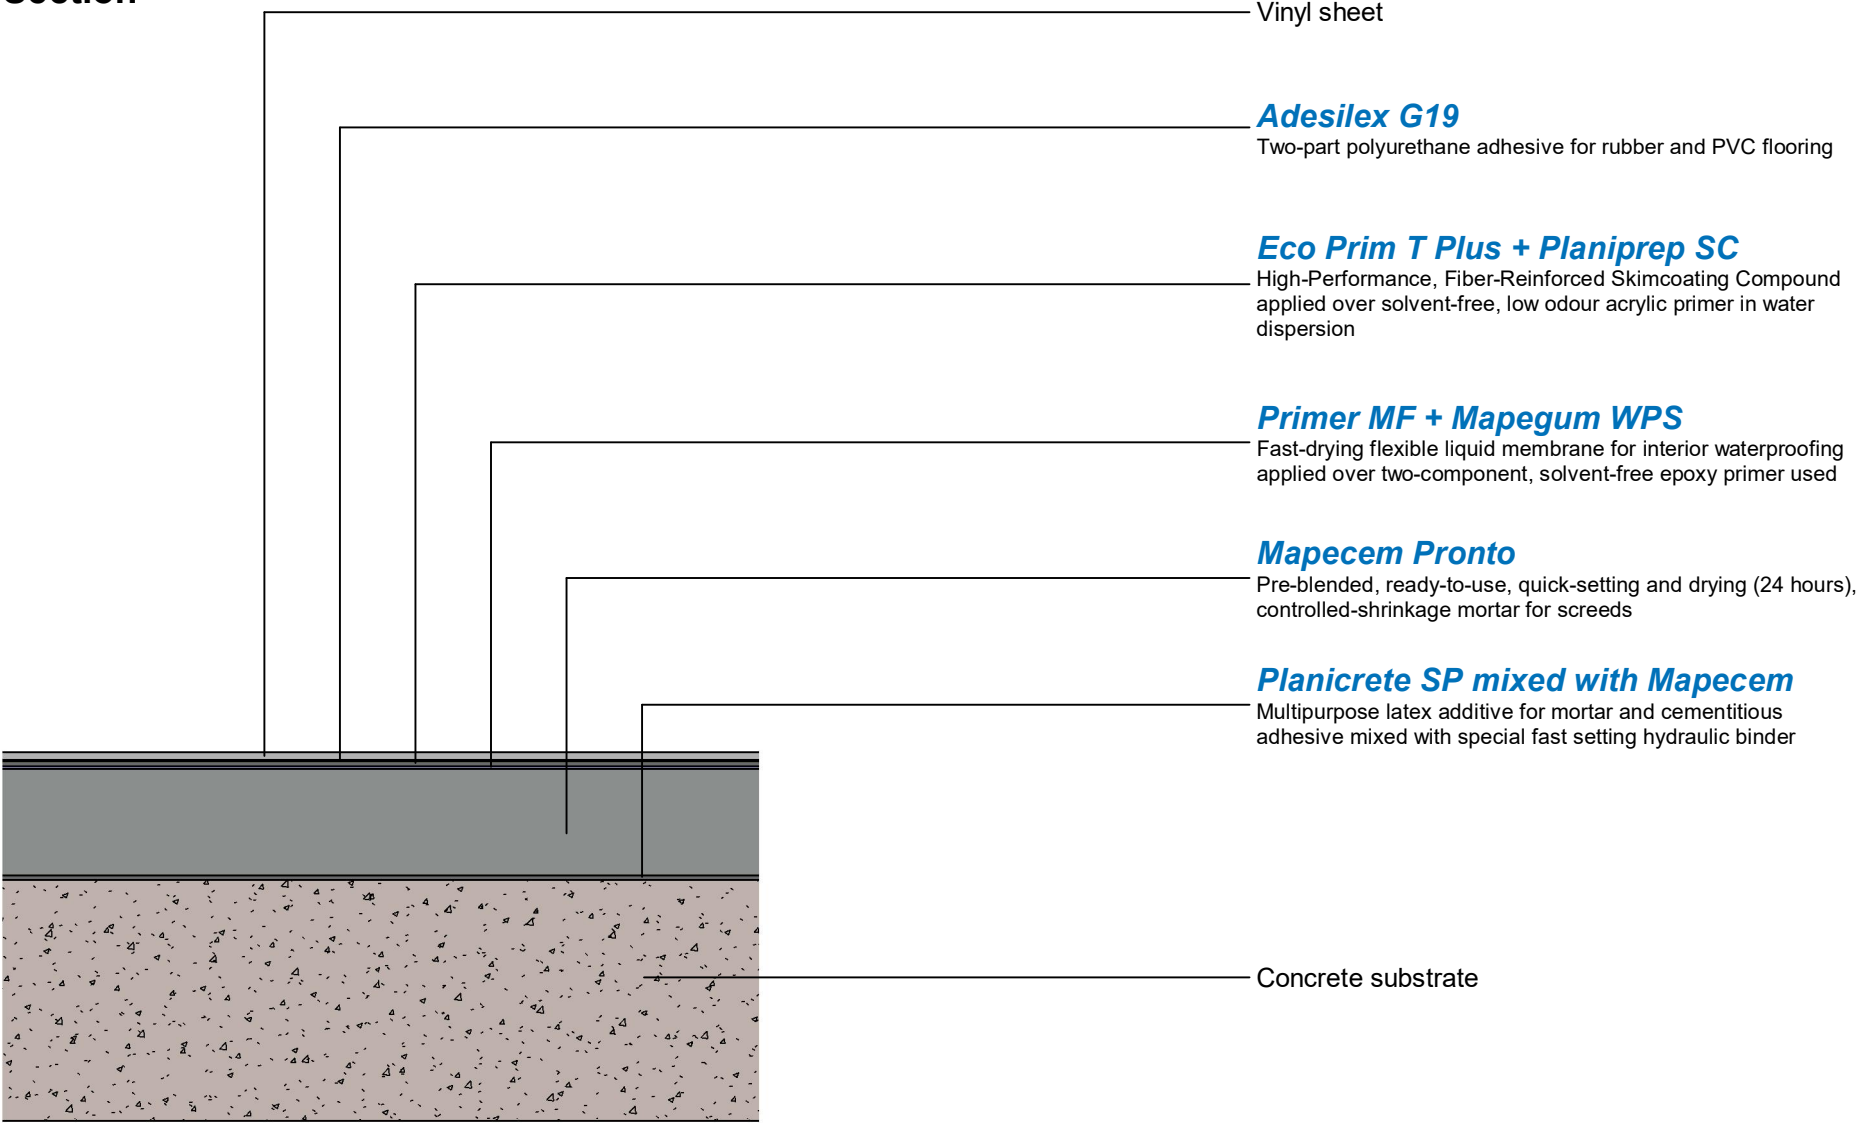

Layer Typesetting

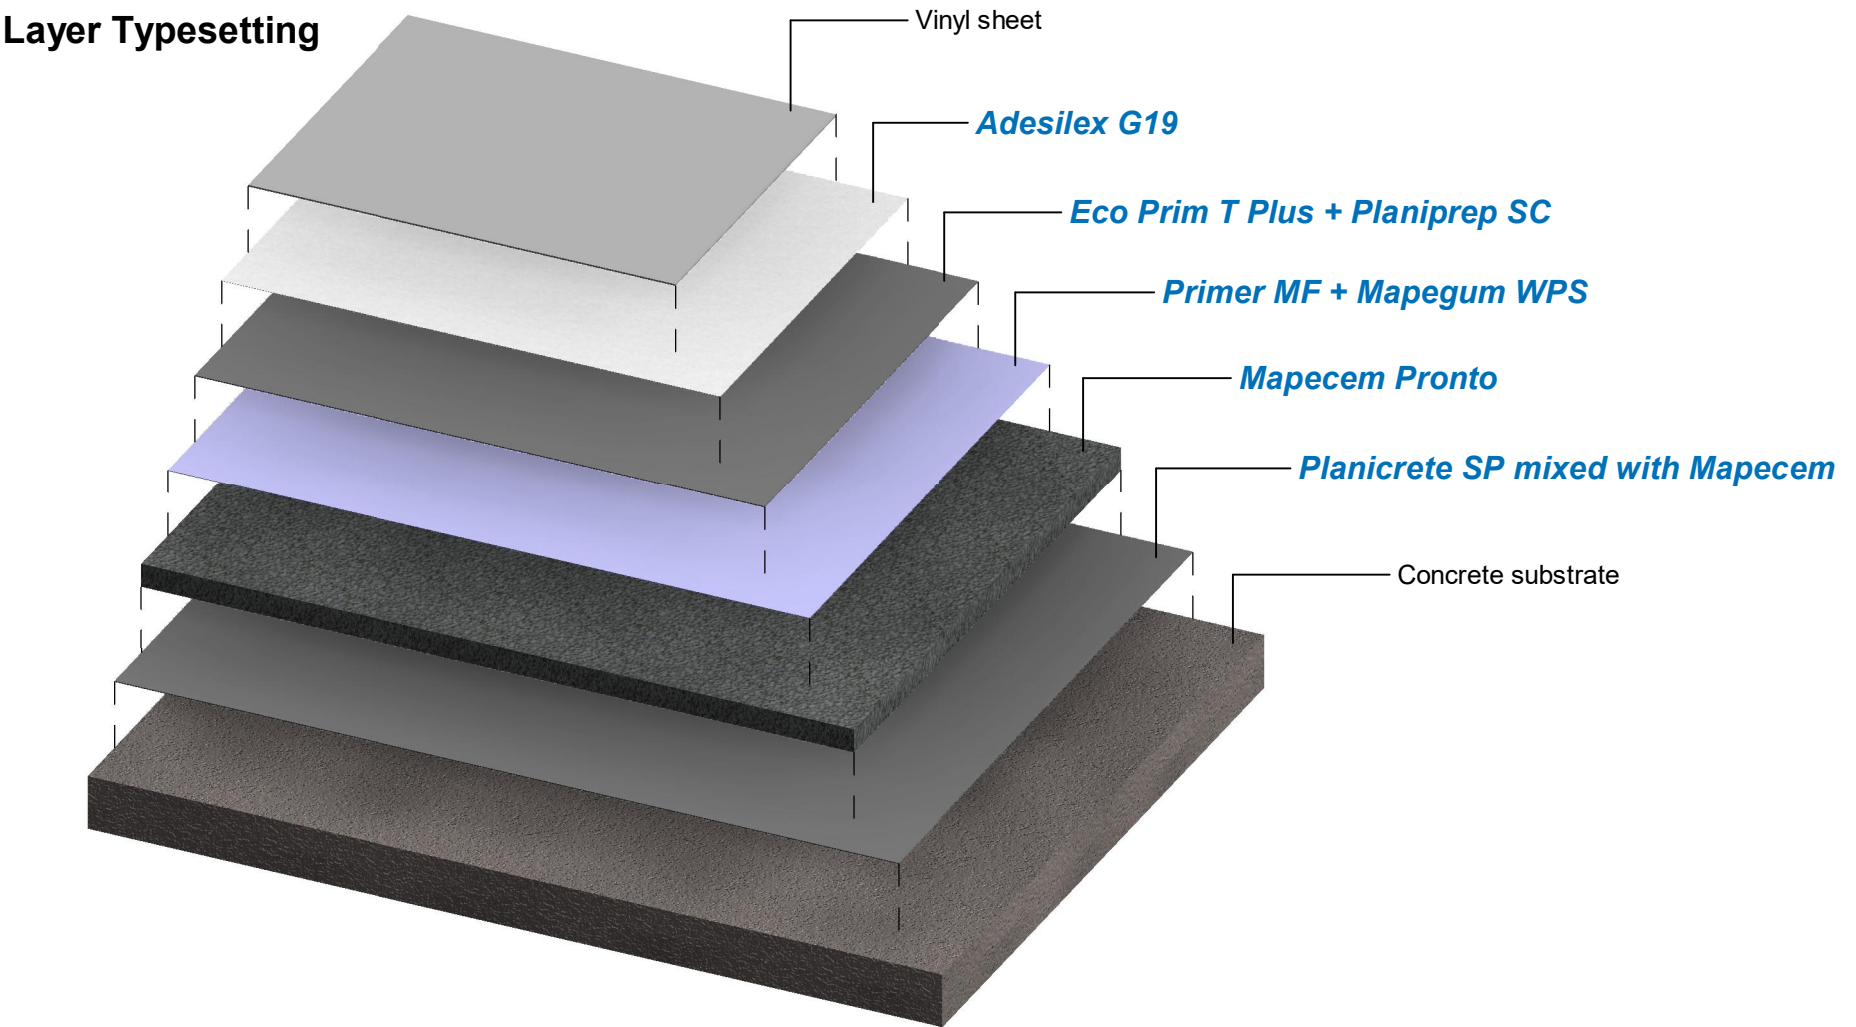

SYSTEM FOR THE INSTALLATION OF VINYL SHEET ON FLOORS IN WET AREAS

Please note that it is the user's responsibility to verify the accuracy of the values supplied by Revit for composite packages and, in all cases, Mapei only guarantees the accuracy of the data and figures for materials/products manufactured by Mapei.

