
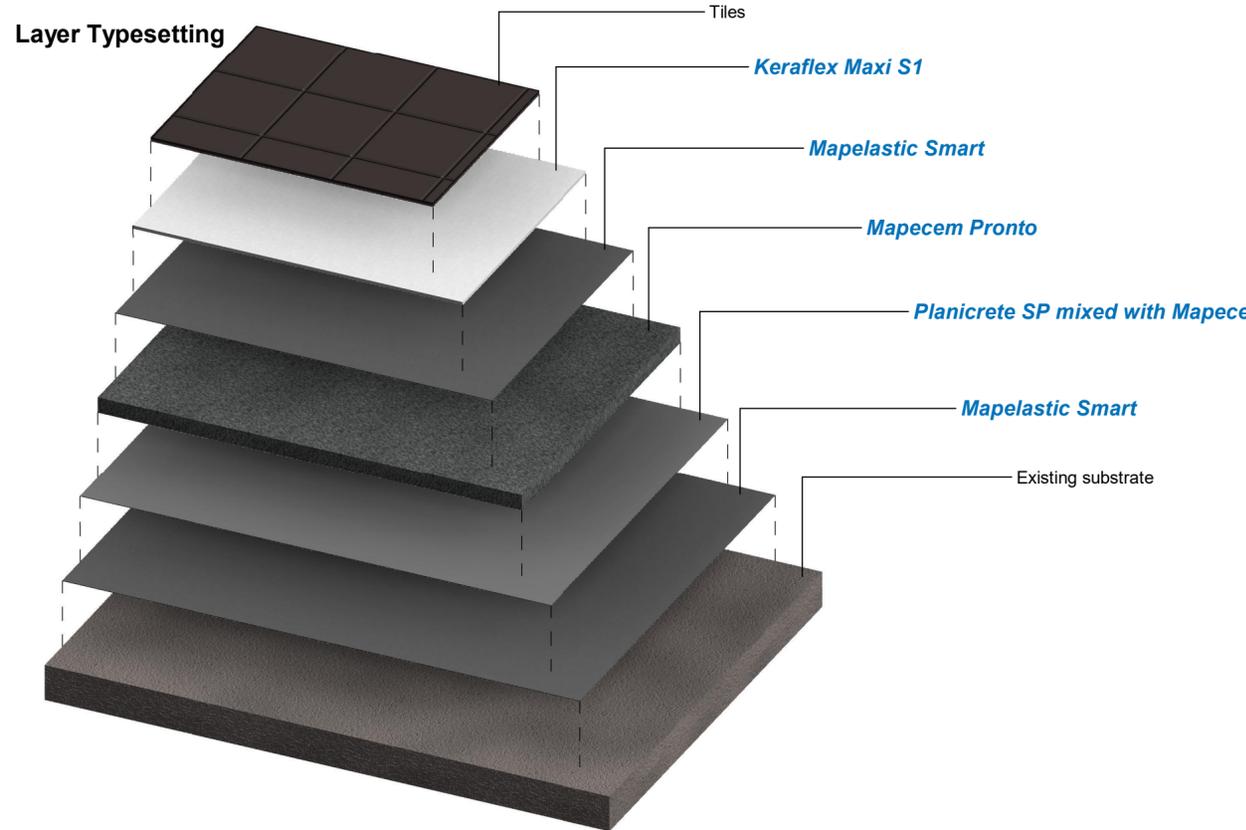


SYSTEM FOR THE INSTALLATION OF CERAMIC TILES & STONE MATERIAL ON BALCONIES

LAYER		TMin	TMax	Consumption
1	Existing substrate	-	-	-
2	<i>Mapelastick Smart</i>	1.6 mm	3 mm	1.6 kg/m ² /mm
3	<i>Planicrete SP mixed with Mapecem</i>	2 mm	3 mm	1.75 kg/m ² (Planicrete SP) 1.75 kg/m ² (Mapecem)
4	<i>Mapecem Pronto</i>	10 mm	70 mm	2 kg/m ² /mm
5	<i>Mapeband Easy</i>	N/A	N/A	See TDS
6	<i>Mapelastick Smart</i>	1.6 mm	3 mm	1.6 kg/m ² /mm
7	<i>Keraflex Maxi S1</i>	2 mm	15 mm	1.2 kg/m ² /mm
8	<i>Ultracolor Plus</i>	N/A	N/A	See TDS
9	Tiles	-	-	-
10	<i>Mapesil AC</i>	N/A	N/A	See TDS

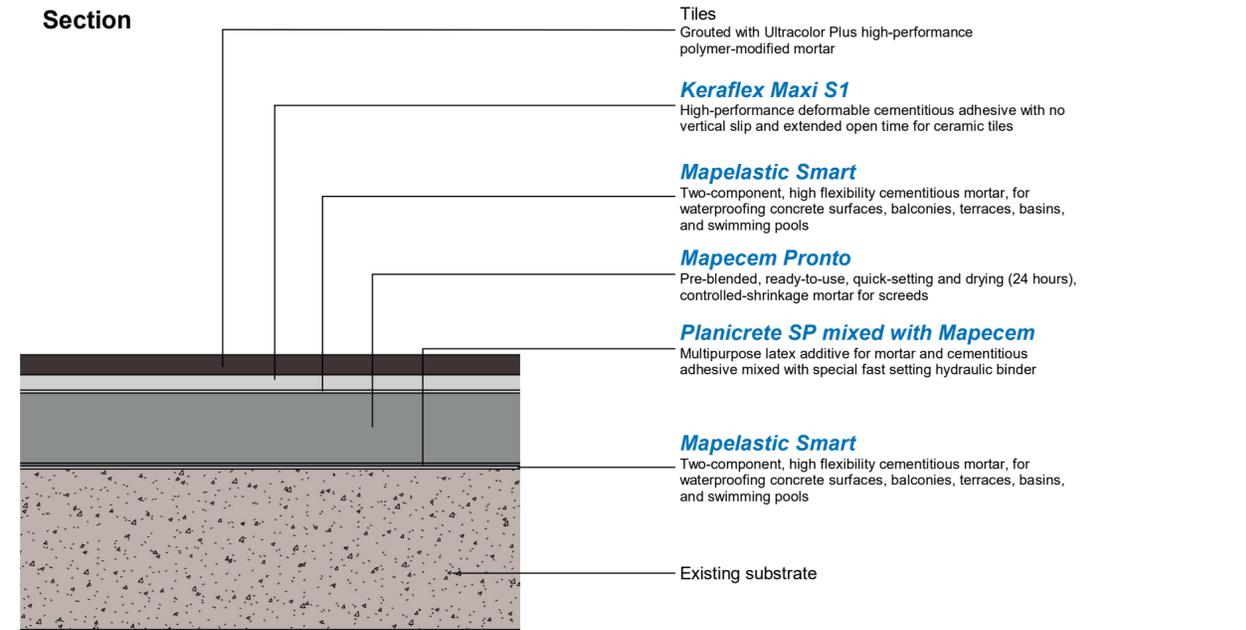

SYSTEM FOR THE INSTALLATION OF CERAMIC TILES & STONE MATERIAL ON BALCONIES

Please note that it is the user's responsibility to verify the accuracy of the values supplied by Revit for composite packages and, in all cases, Mapei only guarantees the accuracy of the data and figures for materials/products manufactured by Mapei.



MAU-02-09-2021

Apply the product according to the thickness specified in the table.
In the layout designed using Autodesk Revit software the minimum representable thickness is 0.8 mm.

For information on the characteristics and how to use the aforementioned products, please refer to the latest version of the relative Technical Data Sheets which are available on our website.
Please, always verify the availability of the proposed system in the country where it will be used.

